

SNOW PLOWS



NOTHING WORKS LIKE A DOGG™

Snow Plow Specifications





1/2 Ton Trucks, J	eeps, and SUVs		
	Medium [Duty Plows (pg. 14-15)	
Specifications	MX68II*	MX75II*	MX80II*
Width	80"	90"	96"
Blade Height	24"	24"	24"
Material	SS	SS	SS
Thickness	.075"	.075"	.075"
Angle Cylinders	1½" x 10"	11⁄2" x 10"	1½" x 10"
Life Ordination	d1/II OII	1 1/II OII	41/1101

Thickness	.075"	.075"	.075"
Angle Cylinders	1½" x 10"	11⁄2" x 10"	1½" x 10"
Lift Cylinder	1½" x 6"	1½" x 6"	1½" x 6"
Kingpin Size	1"	1"	1"
Width at Angle	69.2"	78"	83"
Ribs	6	8	10
Springs	2	2	2
Trip Style	Full	Full	Full
Cutting Edge	3/8" x 6"	3/8" x 6"	1/2" x 6"
Weight ¹	452 lb	482 lb	525 lb
Deflector	Std.	Std.	Std.
Shoes	Cast	Cast	Cast

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight



Heavy Duty Full Trip Plow, Weight Optimized for Lighter Trucks 1/2 Ton Trucks with Plow Prep, 3/4 Ton and Heavier Trucks



Heavy Duty Plows (pg. 18-19)			
Specifications	HD75II	HD80II	
Width	90"	96"	
Blade Height	29"	29"	
Material	SS	SS	
Thickness	.105"	.105"	
Angle Cylinders	11⁄2" x 12"	1½" x 12"	
Lift Cylinder	2" x 6"	2" x 6"	
Kingpin Size	1-1/8"	1-1/8"	
Width at Angle	78"	83"	
Ribs	9	9	
Springs	4	4	
Trip Style	Full	Full	
Cutting Edge	3/8" x 6"	3/8" x 6"	
Weight ¹	680 lb	700 lb	
Deflector	Std.	Std.	
Shoes	Cast	Cast	
1 Maight Not Including Truck A	Aquat 40 00lba Turpical Waight		







3/4 Ton Trucks with Plow Prep, 1 Ton and Heavier Trucks



Commercial Duty Plows (pg. 20-21) **EX80II Specifications EX85II EX90II** 96" 102" 108" Width **Blade Height** 31" 31" 31" Material SS SS SS Thickness .105" .105" .105" **Angle Cylinders** 1½" x 12" 1½" x 12" 1½" x 12" Lift Cylinder 2" x 6" 2" x 6" 2" x 6" **Kingpin Size** 11/8" 11/8" 11/8" Width at Angle 83" 88.3" 93.5" Ribs 9 9 9 Springs 4 4 4 **Trip Style** Full Full Full **Cutting Edge** 1/2" x 6" 1/2" x 6" 1/2" x 6" Weight ¹ 765 lb 785 lb 805 lb Deflector Std. Std. Std. Shoes Cast Cast Cast

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight

TEII



Commercial Duty Trip Edge Plow 3/4 Ton Trucks with Plow Prep, 1 Ton and Heavier Trucks

Commercial Duty Trip Edge Plows (pg. 22-23)			
Specifications	TE75II	TE80II	TE90II
Width	90"	96"	108"
Blade Height	31"	31"	31"
Material	SS	SS	SS
Thickness	.105"	.105"	.105"
Angle Cylinders	1½" x 12"	1½" x 12"	1½" x 12"
Lift Cylinder	2" x 6"	2" x 6"	2" x 6"
Kingpin Size	11/8"	11/8"	11/8"
Width at Angle	78"	83"	94"
Ribs	8	8	8
Springs	4	4	4
Trip Style	Edge	Edge	Edge
Cutting Edge	3/8"" x 6"	1/2" x 6"	1/2" x 6"
Weight ¹	705 lb	772 lb	812 lb
Deflector	Std.	Std.	Std.
Shoes	Cast	Cast	Cast
1 Weight Not Including Truck Mount, 40-80lbs, Typical Weight			

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight;





Hydraulic Wings Expand from 8' - 10'

Expandable Wing Plow (pg. 28-29)				
Specifications	XP810II			
Width	96"-120"			
Blade Height	29"			
Material	SS			
Thickness	.105"			
Angle Cylinders	1½" x 12"			
Lift Cylinder	2" x 6"			
Kingpin Size	11/8"			
Width at Angle	104"			
Ribs	9			
Springs	6			
Trip Style	Full			
Cutting Edge	1/2" x 6"			
Weight ¹	1,150 lb			
Deflector	Std.			
Shoes	Cast			
1 Waight Nat Including Truck Mount 40, 20/ha Tunical Waight				

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight;

Snow Plow Specifications





Medium Duty V Plow (pg. 16-17)			
Specifications	VMX75II		
Width	90"		
Blade Height	27"/33"		
Material	SS		
Thickness	.075"		
Angle Cylinders	1½" x 1¾" x 12"		
Lift Cylinder	1½" x 6"		
Kingpin Size	1"		
Width at Angle	78"		
Ribs	6		
Springs	2		
Trip Style	Edge		
Cutting Edge	3/8" x 6"		
Weight ¹	549 lb		
Deflector	Std.		
Shoes	Opt.		

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight



Commercial Duty V Plow

3/4 Ton Trucks with Plow Prep, 1 Ton Trucks and Up

Commercial Duty V Plows (pg. 24-25)			
Specifications	VXF85II	VXF95II	
Width	102"	114"	
Blade Height	29"/37"	29"/38"	
Material	SS	SS	
Thickness	.105"	.105"	
Angle Cylinders	1½" x 1¾" x 12"	1½" x 1¾" x 12"	
Lift Cylinder	2" x 6"	2" x 6"	
Kingpin Size	1"	1"	
Width at Angle	88"	99"	
Ribs	8	8	
Springs	4	4	
Trip Style	Edge	Edge	
Cutting Edge	1/2" x 6"	1/2" x 6"	
Weight ¹	978 lb	998 lb	
Deflector	Std.	Std.	
Shoes	Opt.	Opt.	
¹ Weight Not Including	n Truck Mount 40-80lbs	Typical Weight	

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight;



Commercial / Municipal Duty V Plow Class 4, 5, and 6 Trucks

Commercial / Municipal Duty V Plow (pg. 26-27)

Specifications	VXX105II
Width	126"
Blade Height	35"/45"
Material	SS
Thickness	.105"
Angle Cylinders	1½" x 1¾" x 12"
Lift Cylinder	2" x 6"
Kingpin Size	1-1/4"
Width at Angle	109"
Ribs	8
Springs	4
Trip Style	Edge
Cutting Edge	5/8" x 6"
Weight ¹	1,038 lb
Deflector	Std.
Shoes	Opt.
¹ Weight Not Including Truc	k Mount 40-80lbs Typical Weight

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight;



Commercial / Municipal Plow For Vehicles with 10,000 - 29,000 GVWR

Commerc	ial / Municip	al Plow (pg.	30-31)
Specifications	CM90II	CM100II	CM110II
Width	108"	120"	132"
Blade Height	31"	31"	31"
Material	SS	SS	SS
Thickness	.105"	.105"	.105"
Angle Cylinders	2" x 12"	2" x 12"	2" x 12"
Lift Cylinder	2" x 6"	2" x 6"	2" x 6"
Kingpin Size	11/8"	11/8"	11/8"
Width at Angle	92"	104"	116"
Ribs	10 ²	10 ²	10 ²
Springs	6	6	6
Trip Style	Full	Full	Full
Cutting Edge	5/8" x 6"	5/8" x 6"	5/8" x 6"
Weight ¹	1,044 lb	1,084 lb	1,124 lb
Deflector	Std.	Std.	Std.
Shoes	Cast	Cast	Cast
114/ 1 / 4/ / / / / / /		on T ,	1 201 0

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight; ² 2 Are Diagonal







Skid Steer Plows with Hydraulic Angling and Trip Edges Universal Skid Steer Mount

Skid Steer Plows (pg. 34-35)				
Specifications	SKTE75	SKTE80	SKTE90	
Width	90"	96"	108"	
Blade Height	31"	31"	31"	
Material	SS	SS	SS	
Thickness	.105"	.105"	.105"	
Angle Cylinders	1½" x 12"	1½" x 12"	11⁄2" x 12"	
Lift Cylinder	N/A	N/A	N/A	
Kingpin Size	1 ½16	1 ¹ ⁄ ₁₆ "	1 ½16"	
Width at Angle	78"	83"	94"	
Ribs	8	8	8	
Springs	4	4	4	
Trip Style	Edge	Edge	Edge	
Cutting Edge	1/2" x 6"	1/2" x 6"	1/2" x 6"	
Weight ¹	781 lb	848 lb	888 lb	
Deflector	Std.	Std.	Std.	
Shoes	Cast	Cast	Cast	

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight;





	UTV Plows (pg. 32	-33)		
Specifications	VUT65	MUT60	MUT68	
Width	72"	72"	80"	
Blade Height	25" / 31"	24"	24"	
Material	SS	SS	SS	
Thickness	.075"	.075"	.075"	
Angle Cylinders	1½" x 1¾" x 8"	1½" x 6"	1½" x 6"	
Lift Cylinder	1½" x 6"	1½" x 6"	1½" x 6"	
Kingpin Size	11⁄8"	1"	1"	
Width at Angle	60"	63"	69"	
Ribs	6	6	6	
Springs	2	2	2	
Trip Style	Edge	Full	Full	
Cutting Edge	1/4" x 5"	1/4" x 5"	3/8" x 6"	
Weight ¹	400 lb	310 lb	360 lb	
Deflector	N/A	N/A	Included	
Shoes	Opt.	Cast	Cast	
1 Weight Not Including Truck Mount 10-80/bs Troical Weight				

¹ Weight Not Including Truck Mount, 40-80lbs. Typical Weight;





	Skid-Steer (pg. 36-37)			
Specifications	2603108	2603110	2603112	
Width	8'	10'	12'	
Blade Height	39"	39"	39"	
Depth	37"	37"	37"	
Moldboard Gauge	7 Ga	7 Ga	7 Ga	
Moldboard Material	Carbon Steel	Carbon Steel	Carbon Steel	
Wear Surface Material	AR400 Steel	AR400 Steel	AR400 Steel	
Side Plate Thickness	5/16"	5/16"	5/16"	
Side Plate Support	3" x 3" x 1/4"	3" x 3" x 1/4"	3" x 3" x 1/4"	
Cutting Edge	1" x 8"	1" x 8"	1" x 8"	
Wear Surface Thickness	3/4"	3/4"	3/4"	
Minimum Horsepower	46	70	85	
Minimum Machine Weight	5,500 lb	7,000 lb	10,000 lb	
Weight	950 lb	1,125 lb	1,250 lb	
Back Drag Kits				
Specifications	9153008 9153010			
Width	8' (For use with 2603108)	10' (For us	e with 2603110)	



313 lb



366 lb

Compact Tractor (pg. 36-37)			
Specifications	2604106	2604108	2604110
Width	6'	8'	10'
Blade Height	28"	28"	28"
Depth	31"	31"	31"
Moldboard Gauge	10 Ga	10 Ga	10 Ga
Moldboard Material	Carbon Steel	Carbon Steel	Carbon Steel
Wear Surface Material	AR400 Steel	AR400 Steel	AR400 Steel
Side Plate Thickness	1/4"	1/4"	1/4"
Side Plate Support	2" x 2" x 1/4"	2" x 2" x 1/4"	2" x 2" x 1/4"
Cutting Edge	1" x 6"	1" x 6"	1" x 6"
Wear Surface Thickness	3/4"	3/4"	3/4"
Minimum Horsepower	30	40	50
Minimum Machine Weight	2,500 lb	3,500 lb	4,500 lb
Weight	400 lb	500 lb	600 lb

Weight



Loader (pg. 38-39)					
Specifications	2601112	2601114	2601116	2601118	2601120
Width	12'	14'	16'	18'	20'
Blade Height	47"	47"	47"	47"	47"
Depth	63"	63"	63"	63"	63"
Moldboard Gauge	7 Ga				
Moldboard Material	Carbon Steel				
Wear Surface Material	AR400 Steel				
Side Plate Thickness	3/8"	3/8"	3/8"	3/8"	3/8"
Side Plate Support	4" x 4" x 3/8"				
Cutting Edge	1-1/2" 10"	1-1/2" 10"	1-1/2" 10"	1-1/2" 10"	1-1/2" 10"
Wear Surface Thickness	1"	1"	1"	1"	1"
Minimum Horsepower	100	120	125	140	170
Minimum Machine Weight	13,000 lb	16,000 lb	25,000 lb	30,000 lb	40,000 lb
Weight	2,200 lb	2,400 lb	2,600 lb	3,000 lb	3,600 lb

BACKHOE SERIES PUSHERS



	Backhoe (pg	g. 40-41)	
Specifications	2602110	2602112	2602114
Width	10'	12'	14'
Blade Height	39"	39"	39"
Depth	51"	51"	51"
Moldboard Gauge	7 Ga	7 Ga	7 Ga
Moldboard Material	Carbon Steel	Carbon Steel	Carbon Steel
Wear Surface Material	AR400 Steel	AR400 Steel	AR400 Steel
Side Plate Thickness	3/8"	3/8"	3/8"
Side Plate Support	4" x 4" x 3/8"	4" x 4" x 3/8"	4" x 4" x 3/8"
Cutting Edge	1-1/2" 10"	1-1/2" 10"	1-1/2" 10"
Wear Surface Thickness	3/4"	3/4"	3/4"
Minimum Horsepower	50	70	85
Minimum Machine Weight	12,000 lb	15,000 lb	16,000 lb
Weight	1,125 lb	1,450 lb	1,600 lb

Backhoe Accessories		
	Part No.	Description
	9151008*	8' Chain/Binder Kit
	9151010*	10' Chain/Binder Kit



SANDBLAST Remove all impurities and contaminants

PRIME Seal and fill any inconsistencies in the material

TOP COAT Acts as an additional primer and prepares the surface for the final treatment

SUPER DURABLE POLYESTER POWDERCOAT Protects your plow from the elements for years to come






WINTER DOESN'T KEEP THREE WAYS TO LIGHT UP THE NIGHT:

Part No. 16160900





Two Lights in One

Integrated 5 pattern strobes powered by 4 ultrabright Amber LEDs on each light.

Sleek Edgeless Low Profile Design

Aluminum die cast construction with heated, tempered glass lens to prevent ice build-up.

DOT Compliant LED Headlights

Twice as bright as standard halogen lights at half the power consumption.

Perfect SnowDogg Compatibility

Plug and Play compatibility with all current and past SnowDogg plows. Uses existing auxiliary wires in the lighting harnesses. No new connections when mounting the plow.



Included Controls & Hardware

Illuminator LP lights with adjustable bracket for easy aiming. Wire in-cab

switch for strobes with "on/off" and flash pattern selector (with 15' of wire). Stainless Steel mounting hardware.



BANKER'S HOURS.





Part No. 16160800

Active Defrosting Technology[™] Prevents streaky defrosting so 100% of the light shines through.

Brilliant Wide-Angle LEDs

Twice as bright as standard halogens at half the power consumption.

Long Lasting Power

Go years without changing a bulb.

HALOGENS HX HIGH INTENSITY



Part No. 16160700A

Powerful Halogens Won't ice up in frigid conditions.

High Intensity Bulbs Our brightest halogen bulbs ever.

Optimized Internal Reflectors For focused high and low beams.

Dual-Post Captive Bolt Design Vibration resistant for years of use.

Need More Light?

Check Page 42 for the Illuminated LED Guides

INSIST ON A PRODUCT





PRECISION WELDING

State-of-the-art robotic welding produces consistent, high quality welds for strong and durable joints.





METICULOUS QUALITY CONTROL

Each plow is inspected and tested at multiple points in its design and production cycle. Field and lab testing make sure plows are ready for the rigors of winter.

RAPID AVAILABILITY

When it comes to snow equipment, we realize no one has time to wait. That's why we stock a deep inventory of plows, electrical connectors, and mounts. Need an unusual mount? Give us a shout—we'll get it to you fast!

STATE-OF-THE-ART MANUFACTURING

FROM A COMPANY YOU CAN TRUST





FLOATING A-FRAME™

Our patented Floating A-Frame's sliding pin design lets SnowDoggs bite the ground for a clean, even scrape. As a bonus, the design also promotes even cutting-edge wear.



UNSTOPPABLE HYDRAULICS

A fully-enclosed 2 HP hydraulic power unit combined with hefty 3/8" hoses and SAE standard cartridge valves give SnowDoggs more responsive angling, stacking, and snow-throwing power.



EASY-TO-USE CONTROLS

The backlit one-handed controller puts all plow functions in the palm of your hand. It's simple to use, even with gloves on.

INNOVATIVE PRODUCT DESIGN


MOUNT AND DISMOUNT IN RECORD TIME WITH THE

RapidLink[™] Attachment System

1. Enter Mount Mode


Hold the Down Button for one second to activate float mode (blue light). Hold the Down Button again for one second to activate Mount Mode (red flashing light).



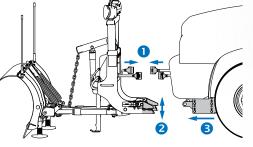

2. Drive Into the Plow and check for Alignment

and check for Alignment






3. Lift Frame too High?


Push the JACK SWITCH into MOUNT (down) position to lower the rear of the lift frame.



Lift Frame too Low?

Back up the truck 6"-12" to allow room to raise the plow receiver. Push the JACK SWITCH into DISMOUNT (up) position to raise the rear of the lift frame.



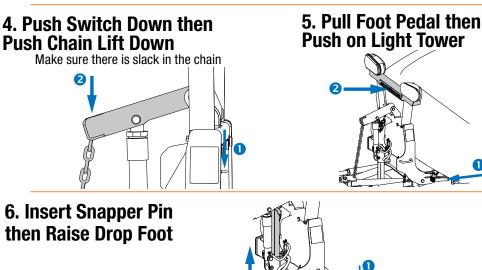

See mount/dismount instructions located on the moldboard for more information. Be sure to register your plow at

www.BuyersProducts.com where you can also find installation instructions, technical specs and full parts diagrams.

Our simple and reliable RapidLink[™] and Jack Switch allow you to adjust the plow's mounting height to different trucks or mounting conditions.

SnowDog

Buvers

RapidLink is patent pending.





Full Plow Features for Lighter Trucks 1/2 Ton Trucks, Jeeps, and SUVs

STANDARD FEATURES

Full Size Features with Half the Weight Weight optimized for 1/2 ton trucks or SUVs (even with no plow prep).

Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

304 Stainless Steel Moldboard & 3/8" Steel Cutting Edge* An investment that will last.

Six 1/4" Laser-Cut Steel Ribs and a Full-Length Cross Tube Provides maximum strength and stability across the length of the plow.

Full Trip Action Two stress-optimized trip springs protect from hidden curbs and obstacles.

*1/2" Steel Cutting Edge on MX80

INCLUDED ACCESSORIES

Contoured Poly Snow Deflector Cast Plow Shoes Wire Reinforced Blade Guides In-Cab Controller Single hand operation.

vaibale State

Available Sizes 6'8", 7'6", 8'



Shown with Illuminator™ Low Profile LED Plow Lights (16160900)

RapidLink[™] Attachment System

Mount and dismount the plow in a minute or less. See page 12 for details.



Optional Wings - Part No. | 16021410

Add 7-1/2" of scraping width to your plow with the MX Plow Wing Kit. Contain snow trails with a 20 degree forward scoop. The cutting edge and curb guards trip with your plow for a clean scrape.





STANDARD FEATURES

Full Size Features with Half the Weight Weight optimized for lighter trucks.

Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

304 Stainless Steel Moldboard & 3/8" Steel Cutting Edge An investment that will last.


Six Laser-Cut Steel Ribs and Two Full-Length Cross Tubes Provides maximum strength and stability across the length of the plow.

Double Acting Angle Cylinders Back drag with confidence, even in tight spaces.

Trip Edge Design Each wing has a 6" trip edge that protects from hidden curbs and obstacles.

INCLUDED ACCESSORIES

Contoured Poly Snow Deflector Wire Reinforced Blade Guides In-Cab Controller Single hand operation.

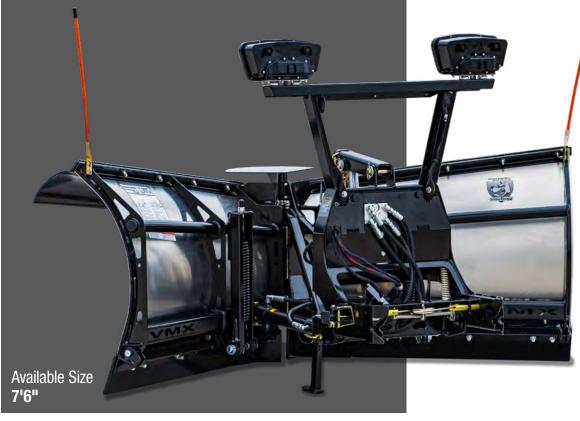




Shown with Illuminator™ Heated LED Plow Lights

RapidLink[™] Attachment System Mount and dismount the plow in a

minute or less. See page 12 for details.



Optional Wings - Part No. | 16021720 Add 7-1/2" of scraping width to your plow with the VMX Plow Wing Kit. Contain snow trails with a 20 degree forward scoop. The cutting edge and curb guards attach to your trip edge for a clean scrape.

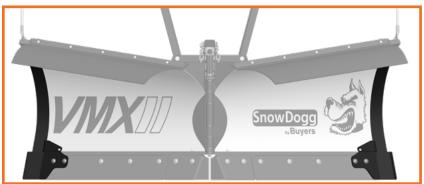



Heavy Duty Full Trip Plow, Weight Optimized for Lighter Trucks

1/2 Ton Trucks with Plow Prep, 3/4 Ton and Heavier Trucks

STANDARD FEATURES

Four Stress-Optimized Trip Springs Protect your equipment from hidden curbs and obstacles.

Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

Municipal Style Chain Lift Stack high and adjust easily.

Fully Enclosed Hydraulic Power Unit Gain easy access via large maintenance panel.

304 Stainless Steel Moldboard & 3/8" Steel Cutting Edge An investment that will last.

Central Hydraulic-Operated Lift Frame Available

INCLUDED ACCESSORIES


Heavy Duty Shock Kit Contoured Poly Snow Deflector Cast Shoes Wire Reinforced Blade Guides Backlit Controller Single hand operation.

Available Sizes **7'6'', 8'**

Shown with HX High Intensity Halogens Also available with Illuminator™ Heated LED Plow Lights

RapidLink[™] Attachment System

Mount and dismount the plow in a minute or less. See page 12 for details.

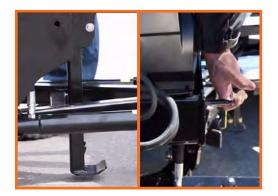

Optional Wings - Part No. | 16021510

Add a full 2' of width to your plow with the HD Series Plow Wing Kit. Wings rotate behind plow for easy stowage, no lifting required. Pin shears upon impact to protect from damage.





Commercial Duty Full Trip Plow

3/4 Ton Trucks with Plow Prep, 1 Ton and Heavier Trucks

STANDARD FEATURES

Four Stress-Optimized Trip Springs Protect your equipment from hidden curbs and obstacles.

Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

Municipal Style Chain Lift Stack high and adjust easily.

Fully Enclosed Hydraulic Power Unit Gain easy access via large maintenance panel.

304 Stainless Steel Moldboard & 1/2" Steel Cutting Edge An investment that will last.

Central Hydraulic-Operated Lift Frame Available

INCLUDED ACCESSORIES

Heavy Duty Shock Kit Contoured Poly Snow Deflector Cast Shoes Wire Reinforced Blade Guides Backlit Controller Single hand operation.

Available Sizes **8', 8'6", 9'**



RapidLink[™] Attachment System

Mount and dismount the plow in a minute or less. See page 12 for details.



Optional Wings - Part No. | 16021610

Add a full 2' of width to your plow with the EX Series Plow Wing Kit. Wings rotate behind plow for easy stowage, no lifting required. Pin shears upon impact to protect from damage.





Commercial Duty Trip Edge Plow 3/4 Ton Trucks with Plow Prep, 1 Ton and Heavier Trucks

STANDARD FEATURES

Trip Edge Design Allows for plowing over obstacles. Great for gravel, dirt, or uneven roads. Floating A-Frame[™]

Contour the road for clean scraping and even cutting edge wear.

Municipal Style Chain Lift Stack high and adjust easily.

Fully Enclosed Hydraulic Power Unit Gain easy access via large maintenance panel.

304 Stainless Steel Moldboard & 1/2" Steel Cutting Edge* An investment that will last.

Central Hydraulic-Operated Lift Frame Available *3/8" Steel Cutting Edge on TE75II

INCLUDED ACCESSORIES


Contoured Poly Snow Deflector Cast Shoes Wire Reinforced Blade Guides Backlit Controller Single hand operation.

Available Sizes **7'6'', 8', 9'**



Shown with HX High Intensity Halogens Also available with Illuminator™ Heated LED Plow Lights

RapidLink[™] Attachment System Mount and dismount the plow in a minute or less. See page 12 for details.

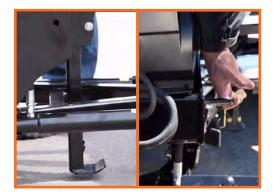

Optional Wings - Part No. | 16021310 Add a full 2' of width to your plow with the TE Series Plow Wing Kit.





Commercial Duty V Plow 3/4 Ton Trucks with Plow Prep, 1 Ton Trucks and Up

STANDARD FEATURES

Trip Edge Design Allows for plowing over obstacles. Great for gravel, dirt, or uneven roads.

Standard Double Acting Angle Cylinders Back drag with ease.

Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

Municipal Style Chain Lift Stack high and adjust easily.

Fully Enclosed Hydraulic Power Unit Gain easy access via large maintenance panel.

304 Stainless Steel Moldboard & 1/2" Steel Cutting Edge An investment that will last.

INCLUDED ACCESSORIES

Contoured Poly Snow Deflector Wire Reinforced Blade Guides Backlit Controller

Switch from V to scoop or angled positions with one button, or maintain independent wing control for finer adjustments.








Shown with HX High Intensity Halogens Also available with Illuminator™ Heated LED Plow Lights

RapidLink[™] Attachment System Mount and dismount the plow in a minute or less. See page 12 for details.

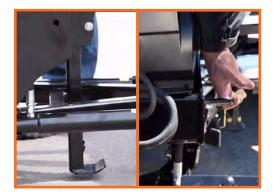

Optional Wings - Part No. | 16021712 Add a full 2' of width to your plow with the VXF Series Plow Wing Kit.





STANDARD FEATURES

Trip Edge Design Allows for plowing over obstacles. Great for gravel, dirt, or uneven roads.

Standard Double Acting Angle Cylinders Back drag with ease.

Heavy-Duty Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

Designed to Take on the Big Jobs 1/2" thick trip angles and a 1-1/4" diameter center hinge pin provide unparalleled strength.

Municipal Style Chain Lift Stack high and adjust easily.

Fully Enclosed Hydraulic Power Unit Gain easy access via large maintenance panel.

304 Stainless Steel Moldboard & 5/8" Steel Cutting Edge An investment that will last.

INCLUDED ACCESSORIES

Contoured Poly Snow Deflector Wire Reinforced Blade Guides Backlit Controller Switch from V to scoop or angled positions with one button,

or maintain independent wing control for finer adjustments.








Shown with Illuminator™ **Heated LED Plow Lights**

RapidLink[™] Attachment System

Mount and dismount the plow in a minute or less. See page 12 for details.

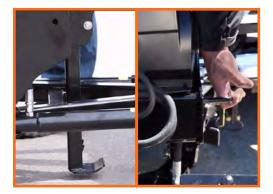

Municipal Style Chain Lift Stack high and adjust easily.



Structurally Reinforced 1/2" thick trip angles and a 1-1/4" diameter center hinge pin provide unparalleled strength.





Independent Hydraulic Wings Expand from 8 - 10 Feet

3/4 Ton and Heavier Trucks

STANDARD FEATURES

True 10' Wide Scoop For efficient snow control and clearing.

Adjustable Flared Wings Can be operated independently for superior windrowing and maneuverability.

Nine Laser Cut Steel Ribs Provide reliable strength.


Floating A-Frame Contour the road for a clean scrape and even cutting edge wear.

Fully Enclosed Hydraulic Power Unit Gain easy access via large maintenance panel.

304 Stainless Steel Moldboard & 1/2" Steel Cutting Edge An investment that will last.

INCLUDED ACCESSORIES

Contoured Belted Rubber Snow Deflector Cast Shoes Wire Reinforced Blade Guides Heavy Duty Shock Kit In-Cab Controller

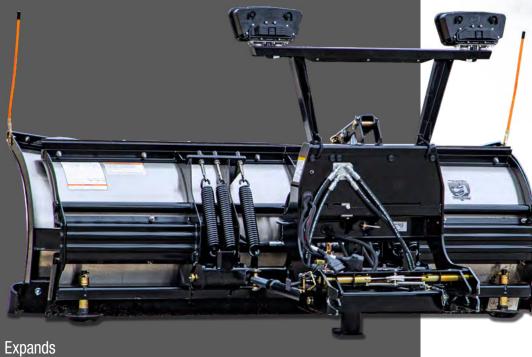





Shown with Illuminator™ Heated LED Plow Lights

Ultimate Versatility

Retract/expand one or both flared wings at the press of a button to efficiently maneuver, windrow, and clear snow.





Commercial / Municipal Plow For Vehicles with 10,000 - 29,000 GVWR

STANDARD FEATURES

31" High / 108" or 120" or 132" Wide Moldboard Makes the CM a powerful snow mover for commercial and municipal applications.

10 Vertical and 2 Diagonal Ribs Create robust strength to handle heavy, wet snow.

Heavy-Duty Floating A-Frame[™] Contour the road for clean scraping and even cutting edge wear.

304 Stainless Steel Moldboard & 5/8" Steel Cutting Edge An investment that will last.

6 Stress-Optimized Trip Springs Provide up to 85° of smooth full-moldboard trip action.

Central Hydraulic-Operated Lift Frame Available

INCLUDED ACCESSORIES

Heavy Duty Belted Rubber Snow Deflector Wire Reinforced Blade Guides Cast Plow Shoes Controller


Available Sizes **9', 10', 11'**



Heated LED Plow Lights

RapidLink[™] Attachment System Mount and dismount the plow in a minute

or less. See page 12 for details.

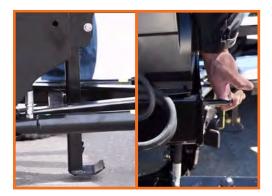

2" x 12" Angle Cylinder Delivers greater angling force than standard cylinders.

Heavy Duty Lift Arm and Cylinder Lift arm with heavy duty 2" x 6"

lift cylinder provides exceptional snow stacking.





Hydraulically-Controlled Plows Specifically Designed for UTV Applications

Ideal for Sidewalks, Parks, and Campuses

STANDARD FEATURES

Weight Optimized for UTVs Get the power of a SnowDogg[®] commercial plow that will fit most full-size UTVs.

Fast-Acting Hydraulic Power Unit Hydraulic angle, lift, and wing control for UTV plows.

304 Stainless Steel Moldboard & 1/4" Steel Cutting Edge* An investment that will last.

Narrow Width at Angle Available at a minimum of 63" with blade at angle.

Full Trip (MUT) or Trip Edge (VUT) Design Feel confident, even when you can't see what's below the snow. **3/8" Steel Cutting Edge on MUT68*

VUT SPECIFIC FEATURES

Double Acting Angle Cylinders Back drag with ease.

Flared Wings Throw snow powerfully.

Narrow Width at "V" position VUT65 has a 60" width in "V" position for narrow sidewalks.

INCLUDED ACCESSORIES

Wire Reinforced Blade Guides Controller Single hand operation.

Available Sizes VUT - 6' MUT - 6', 6'8"





Power Unit / Hydraulics Equipped with full size SAE cartridge valves, oversized rubber hoses, and integral valve manifold.



Angle Cylinders Standard 1-1/2" x 8" double acting angle cylinders allow for real back dragging.





Skid Steer Plows with Hydraulic Angling and Trip Edges

Universal Skid Steer Mount

STANDARD FEATURES

Universal Skid Steer Mount Easily mount to any skid steer.

Hydraulic Angle Cylinders Work with skid steers' existing hydraulic lines for responsive maneuverability.

Trip Edge Design To respond to hidden divots and obstacles.

304 Stainless Steel Moldboard & 1/2" Steel Cutting Edge An investment that will last.

INCLUDED ACCESSORIES

Contoured Poly Snow Deflector Wire Reinforced Blade Guides Cast Plow Shoes







Trip Edge Design Provides smoother plowing over obstacles.



1-1/2" x 12" Angle Cylinders High angling force for handling heavy snow.



Optional Wings - Part No. | 16021310 Add a full 2' of width to your plow with the TE Series Plow Wing Kit.





Minimum Required Machine Weight of 5,500 lb / 2,500 lb Minimum Required Horsepower of 46 HP / 30 HP

STANDARD FEATURES

Durable Tuff-Kote[™] Finish Corrosion resistant powder coat doubles the life of your pusher.

Dual 4" Channels Durable support where it's needed most.

AR400 Wear Shoes Abrasion resistant steel provides superior wear life.

Universal Quick-Coupler Attachment Versatile and easy attachment and removal.

Heavy Duty Precision-Rolled Moldboard Enhanced snow rolling for a better quality push.

SKID-STEER SERIES SPECIFIC FEATURES

Premium Rubber Compound Cutting Edge 1" x 8" cutting edge slices through snow and ice.

Extreme-Duty Wear Shoes

5" x 3/4" wear shoes are made of AR400 steel for far greater wear life.

COMPACT SERIES SPECIFIC FEATURES

Premium Rubber Compound Cutting Edge 1" x 6" cutting edge slices through snow and ice.

Extreme-Duty Wear Shoes

3" x 3/4" wear shoes are made of AR400 steel for far greater wear life.







SKID-STEER SERIES SPECIFIC FEATURES



Optional Back Drag Kits Include a 1" x 6" rubber cutting

edge mounted to a black powder coat steel frame & a set of 3/4" thick abrasion resistant steel wear shoes. Used to pull snow away from buildings, docks and other tight places. The kit is bolt-on & removable.

COMPACT SERIES SPECIFIC FEATURES Rubber Edge





3/8" x 3" rubber edge mounting bracket, 1" x 6" premium rubber edge, 5/8-11, grade 5 carriage bolts



7 Ga Rolled Steel Moldboard with 5/16" thick side plates





Minimum Required Machine Weight of 13,000 lb Minimum Required Horsepower of 100 HP

STANDARD FEATURES

Durable Tuff-Kote[™] Finish Corrosion resistant powder coat doubles the life of your pusher.

Extreme Duty 12" H-Beam Design Dependable strength where it's needed most.

Inside Posts with 3/8" Side Plates Protect the equipment from impact damage.

Fully-Welded Lower Posts Keeps the post higher off the ground to prevent damage from roll back.

AR400 Wear Shoes Abrasion resistant steel provides superior wear life.

Premium Rubber Compound Cutting Edge 1-1/2" x 10" cutting edge slices through snow and ice.

AVAILABLE ACCESSORIES

8' Chain/Binder Kit - Part No. 9151008 10' Chain/Binder Kit - Part No. 9151010







7 Ga Rolled Steel Moldboard with 3/8" thick side plates



Rubber Edge 3/8" x 4" rubber edge mounting bracket, 1-1/2" x 10" premium rubber edge, 5/8-11, grade 5 carriage bolts



Reinforced Support 4" x 4" 3/16" lower posts and 3" x 4" x 3/16" upper posts with 72" wide x 4.5" tall post spacing





Minimum Required Machine Weight of 12,000 lb Minimum Required Horsepower of 50 HP

STANDARD FEATURES

Durable Tuff-Kote[™] Finish Corrosion resistant powder coat doubles the life of your pusher.

Extreme Duty 12" H-Beam Design Dependable strength where it's needed most.

Inside Posts with 3/8" Side Plates Protect the equipment from impact damage.

Fully-Welded Lower Posts Keeps the post higher off the ground to prevent damage from roll back.

AR400 Wear Shoes Abrasion resistant steel provides superior wear life.

Premium Rubber Compound Cutting Edge 1-1/2" x 10" cutting edge slices through snow and ice.

AVAILABLE ACCESSORIES

8' Chain/Binder Kit - Part No. 9151008 10' Chain/Binder Kit - Part No. 9151010







7 Ga Rolled Steel Moldboard with 3/8" thick side plates



Rubber Edge 3/8" x 4" rubber edge mounting bracket, 1-1/2" x 10" premium rubber edge, 5/8-11, grade 5 carriage bolts



Reinforced Support 4" x 4" 3/16" lower posts and 3" x 4" x 3/16" upper posts with 68" wide x 4.5" tall post spacing



CIAL SNOWDOGG® ACCESSORIES

Cutting Edges

Steel Cutting Edge

Π Π

.

Part No.	Description
16120506	Cutting Edge, 72" x 1/4" (MUT60)
16120510	Cutting Edge, 80" x 3/8"
16120520	Cutting Edge, 90" x 3/8"
16120530	Cutting Edge, 96" x 3/8"
16120610	Cutting Edge, 90" x 1/2"
16120620	Cutting Edge, 96" x 1/2"
16120630	Cutting Edge, 102" x 1/2"
16120640	Cutting Edge, 108" x 1/2"
16120660	Cutting Edge, 108" x 5/8" (CM90)
16120662	Cutting Edge, 120" x 5/8"

Part No.	Description
16120664	Cutting Edge, 132" x 5/8" (CM110)
16120705	Cutting Edge, 80" Rubber
16120710	Cutting Edge, 90" Rubber
16120720	Cutting Edge, 96" Rubber
16120730	Cutting Edge, 102" Rubber
16120740	Cutting Edge, 108" Rubber
16120810	Cutting Edge, 34" x 3/8", VMX75
16120811	Cutting Edge, 34" x 1/2", VMX75
16120820	Cutting Edge, 40" x 1/2", VXF85
16120830	Cutting Edge, 46" x 1/2", VXF95

Rubber Deflectors



Part No.	Description
16120157	Deflector, 90" Rubber
16120159	Deflector, 96" Rubber
16120161	Deflector, 102" Rubber
16120163	Deflector, 108" Rubber
16120164	Deflector, 120" Rubber
16120165	Deflector, 132" Rubber (CM110)
16120171*	Deflector, VXF85, Rubber
16120173*	Deflector, VXF95, Rubber
16120180	VXF Rubber Kit
*1/ plaws pood to	a deflectore

*V-plows need two deflectors

Back Drag Edges



Part No.	Description
16124010	Back Drag Edge, MD68
16124020	Back Drag Edge, 7.5' MD/HD/EX
16124030	Back Drag Edge, 8' MD/HD/EX
16124040	Back Drag Edge, 8.5' EX85
16124050	Back Drag Edge, 9' EX90
16124060	Back Drag Edge (Pair), VXF85
16124070	Back Drag Edge (Pair), VXF90
16124080	Back Drag Edge (Pair), VMX75

Rubber Cutting Edge

. .

Part No.	Description
16120840	Center Cutting Edge, V-Plow DS
16120842	Center Cutting Edge, VUT DS
16120852	Center Cutting Edge, VUT PS
16120850	Center Cutting Edge, V-Plow PS
16120860	Cutting Edge, VUT
16120870	Cutting Edge, VXX105
16120920	Cutting Edge, 90" x 1/2", XP810
16120940	Wing Cutting Edge, XP810 DS
16120950	Wing Cutting Edge, XP810 PS

Maintenance



i ui t iiu.	Description
16109020	Emergency Kit for Straight Blade Plow
16109030	Emergency Kit for V-Plow
16150010	Hydraulic Fluid, 12 QTS Case

Chain/Binder Kits

Part No.	Description
9151008*	8' Chain/Binder Kit
9151010*	10' Chain/Binder Kit


Illuminated LED Guides



Part No.	Description
1308124	24 Inch Illuminated LED Snow Plow Blade Guides
1308128	28 Inch Illuminated LED Snow Plow Blade Guides
1308136	36 Inch Illuminated LED Snow Plow Blade Guides

- Patented light-up design makes it easier to see your equipment in low visibility conditions
- Includes wiring harness that is 12 ft per side with a pre-terminated male bullet connector and ring terminal to connect to the LED guides
- Unique, eye-catching look helps your truck stand out from the competition
- Easy wiring and installation that only requires a few basic tools
- · Compatible with most snow plows and truck bumpers



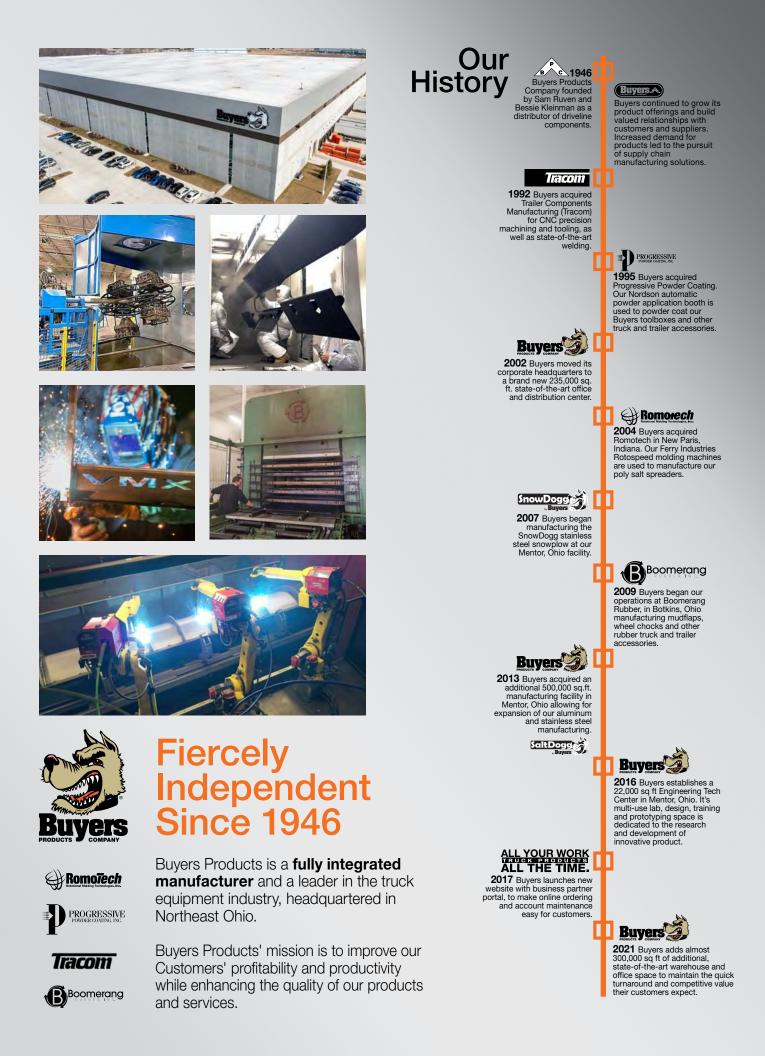

NOTHING WORKS LIKE A DOGG™



www.buyersproducts.com



SnowDogg "Buyers







